

Mounting of Rockfon Acoustic plates

3


For mounting Rockfon Acoustic plates in size:

600 mm x 600 mm x 20 mm
600 mm x 600 mm x 40 mm
600 mm x 1200 mm x 20 mm
600 mm x 1200 mm x 40 mm

Turbo Tack 291 & Montage Extra 292 is recommended.

Before mounting it is important to make sure that the sealing is clean and dry, free of grease, dust and loose particles. It is also important to make sure that the sealing is even, max. variation of +/- 2 mm on a 2 meter distance, and free of burrs and ridges. The plates should be clean and whole.

The adhesive is applied as strings on the backside of the plate. The strings of adhesive should be approx. 5 mm in diameter, and should be placed with a distance of approx. 10 cm. This means that each cartridge has a yield of mounting for 4 plates of the size 600mm x 600mm or 2 plates of the size 600mm x 1200mm.

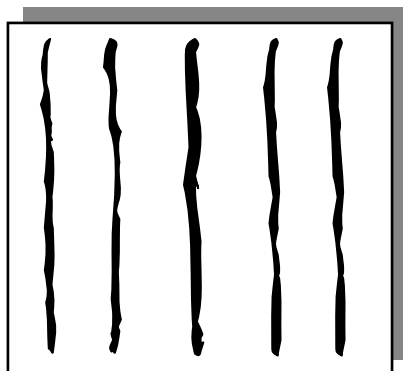

After applying the adhesive the plates are placed closet to their final location and carefully pressed into place. After that the plates stay in place while the adhesive cures over the next 24-48 hours.

It is important that the boards that are to be put up are acclimatized to room temperature.

Be aware: Be very careful, so you won't get adhesive on the front of the plates, as it is almost impossible to clean with a satisfactory result. When sealing Rockfon plates with certain sealants, a discoloring of the plate has been observed. The discoloration does not appear until after several months. This phenomenon has been observed with Danaseal Interior 521.

The information and data contained in this Product Information sheet are based on extensive laboratory testing and our practical experiences, and are meant for helping the user to find optimum working methods. As the conditions at the user are beyond our control, we make no warranties concerning the results, achieved by the products. The information's in this Product Information sheet are typical values, intended as a guideline. They should not be regarded as product specifications. Please also refer to our standard sales conditions and terms of delivery.

**DANA LIM A/S - KØBENHAVNSVEJ 220 - DK-4600 KØGE - DENMARK -
INFO@DANALIM.DK
PH. (+45) 56 64 00 70 - TELEFAX (+45) 56 64 00 90 -**

Mounting of Rockfon Acoustic plates- Date of issue 24.03.2017

HOW TO DO



DANA LIM